

PVC-Coated SpeedCouple

for use with PVC-Coated Rigid Conduit or Elbows

Description & Application

PVC-Coated SpeedCouple is used to quickly and easily install PVC-coated rigid conduit and elbows. Rated for direct burial and ideal for tight space applications, PVC-Coated SpeedCouple allows you to complete connections without having to turn the conduit or elbows.



Features

- Trade sizes 2" through 6"
- 40 mil gray PVC exterior coating, urethane interior coating
- Sealing Sleeves on both ends
- Stainless Steel Locking Screw
- Lead-in threads facilitate threading & ground continuity
- Concrete tight
- Suitable for direct burial
- NPT Threads


Standards

- UL514B
- CSA C22.2 No. 18.3-12
- File Number - E200413

Materials & Finishes

Material: Steel Coupling, Stainless Steel Locking Screw

Exterior Finish: A nominal .040 inch (40 mil) gray PVC Coating

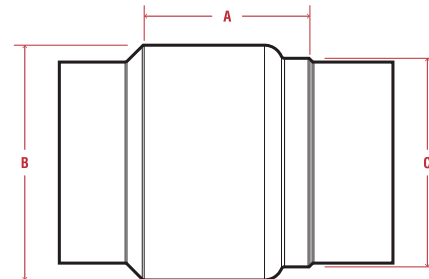

Technical/Specification Documents

Specification Guide (1995 Master) Available on Website

Specification Guide (2004 Master) Available on Website

Installer Certification and Tools Available on Website

Chemical Resistance Charts Available on Website

Performance Specifications Available on Website

Dimensions

COUPLING SIZE	A	B	C
2"	2.459	2.955	2.64
2-1/2"	3.425	3.58	3.131
3"	3.545	4.19	3.748
3-1/2"	3.665	4.83	4.25
4"	3.761	5.33	4.755
5"	4.065	6.355	5.86
6"	4.065	7.463	6.91

Ordering Information

CATALOG NUMBER	DESCRIPTION	WEIGHT PER 100 (LBS)	STANDARD PACK QUANTITY	UPC	AVAIL. CODE
PRSCPLG-2	2" PVC-COATED SPEEDCOUPLE	88	30	784011923090	1
PRSCPLG-2-1/2	2-1/2" PVC-COATED SPEEDCOUPLE	176	9	784011923106	1
PRSCPLG-3	3" PVC-COATED SPEEDCOUPLE	198	8	784011923113	1
PRSCPLG-3-1/2	3-1/2" PVC-COATED SPEEDCOUPLE	265	8	784011923120	1
PRSCPLG-4	4" PVC-COATED SPEEDCOUPLE	309	8	784011923137	1
PRSCPLG-5	5" PVC-COATED SPEEDCOUPLE	397	4	784011923144	1
PRSCPLG-6	6" PVC-COATED SPEEDCOUPLE	525	2	784011923151	1